

## IOT BASED FILTER TESTING AND MONITORING

Mr. A Senthilkumar (Professor)

Priyadharshini S, Sangeetha S, Sanjana L, Santhiya D

Department of Electronics and Communication Engineering,

Sri Shakthi Institute of Engineering and Technology, Coimbatore.

Email id: psssece20@gmail.com

**Abstract:** Water is more essential for human life and health. A monitoring system based on a wireless sensor network and IoT is required to establish a good quality of water. An intelligent electronic monitoring technique in which the application displays the parameters such as pH value, dissolved oxygen content and conductivity level of drinking. These parameters of water are sent to the IOT server. With the help of a wireless GSM (Global System for Mobile communication), the customer will be informed about the condition of the filter, and the service provider is immediately informed of replacing the filter. The esp8266 12e module is used to connect Wi-Fi module and GSM.

**Keywords – Internet of Things (IoT), Sensor, Water purification, GSM module.**

### I INTRODUCTION

Pure and clean drinking water isn't available now a days. It is very important to each one of us to know about the purification techniques to provide a good quality of water to our generation. One of the common methods of purification is to add chlorine in water. There are many water purifiers with filters such as Ultra Violet, Reverse osmosis, Activated carbon, Ion exchange resin filter. Water purification process removes the suspended solids, gases, chemicals and other undesirable materials in water. The side effects of drinking the contaminated water leads to diarrhea, vomiting, typhoid

fever, nausea and more. The use of microcontroller which in cooperates pH sensor, dissolved oxygen sensor and conductivity sensor to monitor the good quality of water is essential.

### II LITERATURE SURVEY

GSM based smart water purifier *pooja, prince (published on 2016)* In this project, microcontroller 8051 which controls all the modules such as GSM (SIM900), Max232, LCD, ADC (0808), Temperature sensor, TDS sensor, Gas sensor, Optocoupler, Relay, Motor, Buzzer, Power supply. TDS level of water is measured along with the temperature level of water and in addition to that gas leakage in the kitchen can be detected. When the measure value exceeds the reference value, buzzer gives an alarm and the LCD displays the message. These values are interfaced with ADC0808. GSM is connected to microcontroller Max232 through which an alert message is sent for the user about the filter condition. This will reduce the botheration of user about the maintenance and service of the purifier.

**A comprehensive monitoring and controlling system for multifunctional direct drinking machine based on IoT** *Kun Xia, Hongen Li, Anghui Chen, Bangzheng Liu, Shaohua Li (published on 2018)* This paper includes remote monitoring and controlling system based on Internet of Things (IoT). The value of

temperature sensor, flowmeter and water level gauge are sent to the local control system and are managed in the cloud by General Packet Radio Service (GPRS) network and Wireless Fidelity (Wi-Fi). It is user friendly and easy to operate in real time. Radio frequency identification (RFID) and mobile payment technology are used to find the automatic user identification. This system realizes the functions of connecting user and Internet of Things.

### III PROPOSED METHODOLOGY

The quality of water is monitored by measuring the pH level, dissolved oxygen content and conductivity value of water using sensors. The service provider and the customer will get an alert message about the condition of the filter when the measured value exceeds the reference value. An application based on IoT will provide the values of sensor through a microcontroller interfaced with Wi-Fi module esp8266 12e.

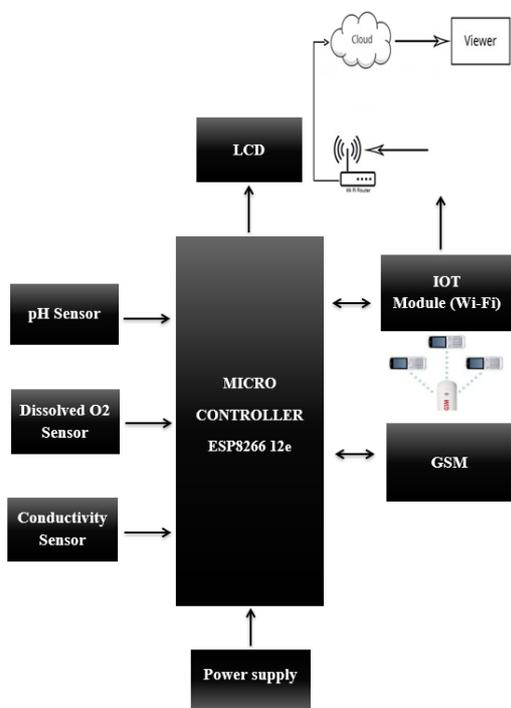


Fig.1.1 Block diagram

### WORKING

The proposed system will monitor the quality of water by measuring the different values of pH, dissolved oxygen content and conductivity by using the sensors. These sensors are interfaced with a microcontroller esp8266 12e which also acts as an Wi-Fi module. GSM (SIM800L) is interfaced with the microcontroller to send messages for the service provider and customer about the filter condition. An application which continuously monitors the filter condition and gives the current update of the water purity level. The values are displayed in LCD. When the condition of filter is worse an alert message will be sent to both customer and service provider. Thus, maintenance of the filter and service can be improved from this method.

### COMPONENTS AND REQUIREMENTS

The major components employed in this method are,

- a. ESP8266 12E
- b. pH sensor
- c. Dissolved oxygen sensor
- d. Conductivity sensor
- e. GSM (SIM800L)

### ESP8266 12E

The ESP8266 12E Wi-Fi module with integrated TCP/IP protocol enable the microcontroller to access the Wi-Fi network. This module contains a preprogram through which Arduino device can be easily interfaced. The ESP8266 12E chip has 17 GPIO pins.




Fig.1.2 ESP8266 12E

The following pin description explains the features of ESP8266 12E chip pinout,

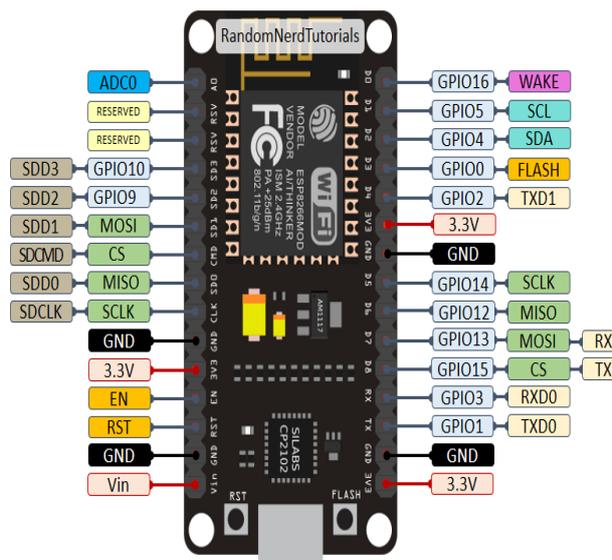


Fig.1.3 ESP8266 12E Pin description

**pH sensor**  
 pH is the hydrogen ion concentration in any solution. It varies between 0-14. Measuring the value of pH gives the measure of alkalinity or acidity of solution. When the pH lies between 0-7 the solution is acidic with large hydrogen ion concentration whereas the solution having pH value between 8-14 are basic with small hydrogen ion concentration. The pH value of 7 is neutral. The pH value between 6.5-8.5 is considered as the normal drinking water quality.

**Dissolved oxygen sensor**

Dissolved oxygen (DO) sensor measures the amount of oxygen content dissolved or carried in liquid process. The sensor consists of potassium chloride (KCl) solution which acts as an electrolyte. When the oxygen flows through the membrane and the current flow between the electrode is measured which is proportional to concentration of dissolved oxygen. The optimal level of dissolved oxygen content is 0-27ppm.



Fig.1.4 Dissolved Oxygen sensor

**Conductivity sensor**

Conductivity sensor is used to determine how well the solution conducts an electric current. The current flows by the ion transport. When the solution contains more ions then the conductivity of the solution is high.

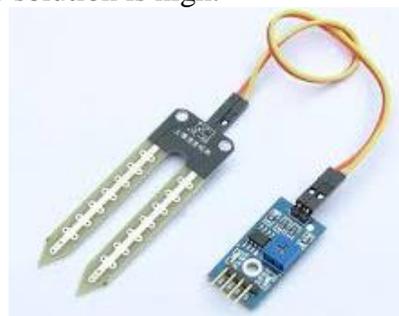


Fig.1.5 Conductivity sensor

**GSM (SIM800L)**

Global System for Mobile communication is used for transmitting mobile voice and data service. GSM is widely accepted and used globally. It makes use of Time Division Multiplexing Access (TDMA) technique for transmitting data.




Fig.1.6 GSM (SIM800L)

#### IV RESULTS AND DISCUSSIONS

The most basic need of people is good quality of drinking water. The water quality parameters are measured quickly in a real time process. This project ensures the monitoring of water quality for domestic and industrial purpose.


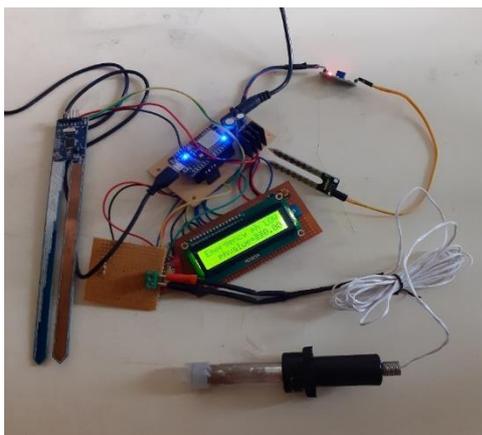



Fig.1.6 LCD displaying the values of water content

The below result shows the range of values for good drinking water. When the pH value lies between 6-8, dissolved oxygen content lies between 0-27 and conductivity is 1 then the water is good to drink.

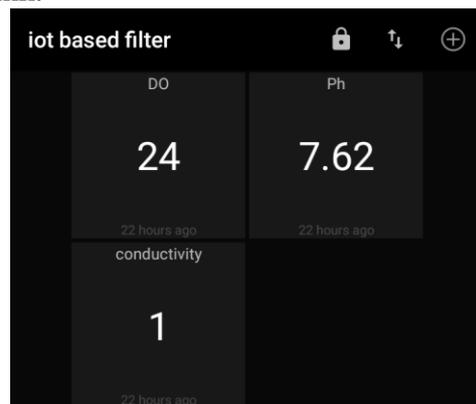

Software displaying the values of water content

When pH lies between 0-5 and 9-14, dissolved oxygen lies between 28-50 and conductivity is 0 the application displays the below result.

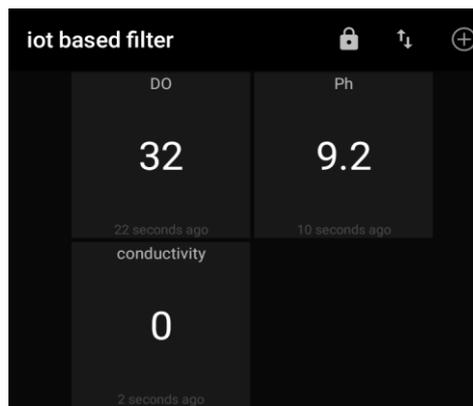

Software displaying the values of water content

#### V CONCLUSION

Thus, with the help of this technique the service provider will be able to know about the condition of the filter without any human interference and provide a quality service. The filter quality can be monitored regularly and reduces the botheration about the maintenance and service of the filter replacement. It also reduces the rising customer complaints and provides healthy water to drink.

#### VI REFERENCES

- [1] Eobin Alex George, Gaurav Tiwari, "Multi stage organic water filter system", IEEE Global Humanitarian Technology Conference, 2014.
- [2] Pooja, Prince, "GSM based smart water purifier", International Journal of Innovations in Engineering and Technology, Vol 7, Issue 3, October 2016.
- [3] Kun Xia, Hongen Li, "A comprehensive monitoring and controlling system for multifunctional direct drinking machine based on IoT", Asia-Pacific Magnetic Recording Conference 2018, USST, China.
- [4] Ibraheem Mohammed Khaleel, Hazem Noori Abdulrazzak, "Monitoring of water purification process based on IoT", IOSR Journal of Electronics and Communication Engineering, Vol 14, Issue 2, April 2019.

**AUTHOR PROFILE:**



Mr.A.Senthilkumar, received the BE degree in Electronics and Instrumentation Engineering from the Tamilnadu College of Engineering, Coimbatore, India, in 2004 and the ME degree in Applied Electronics from Maharaja College of Engineering and Technology, Coimbatore, India , in 2007. Currently working in Sri Shakthi Institute of Engineering & Technology, Coimbatore, as Asst Professor (Senior grade) from (2007-Till date). His research interest includes Analog Electronics, Sensors & Transducers, Troubleshooting in Printed Circuit Boards, LabVIEW, Multisim.



Sanjana. L, currently pursuing BE degree in Department of Electronics and Communication Engineering from Sri Shakthi Institute of Engineering and Technology, Coimbatore. Her research interest includes digital electronics, wireless communication system and Mobile Ad Hoc networks.



Priyadharshini.S, currently pursuing BE degree in Department of Electronics and Communication Engineering from Sri Shakthi Institute of Engineering and Technology, Coimbatore. Her research interest includes Control systems, signals and system, and Wireless networks.



Santhiya. D, currently pursuing BE degree in Department of Electronics and Communication Engineering from Sri Shakthi Institute of Engineering and Technology, Coimbatore. Her research interest includes digital signal processing, Antenna wave propagation, Digital communication.



Sangeetha S, currently pursuing BE degree in Department of Electronics and Communication Engineering from Sri Shakthi Institute of Engineering and Technology, Coimbatore. Her research interest includes Mobile Ad Hoc networks, VLSI design and Wireless communication system.